



HP2
HOOK POTENTIAL



MVP™

CORE.

Inside, you will find the newly created Neutron NXT Core. The basis of this core was the original Neutron Core from yesteryear that was found in the Wrecker series of balls. We wanted a higher rg core that tumbles down the lane while still providing plenty of motion at the breakpoint.

Neutron NXT™ Core

	16lb	15lb	14lb	13lb	12lb	11lb	10lb
RG VALUE:	2.55	2.55	2.55	2.63	2.65	2.73	2.77
RG DIFFERENTIAL:	0.040	0.040	0.040	0.009	0.011	0.012	0.015

COVER.

The newly formulated VTC-H19 Hybrid cover is the next advancement from the VTC-H18 Hybrid cover used on the Hustle HSB. This new formula will provide even more responsiveness to friction down lane than previous hybrids used in the HP2 & HP1 lines.

Factory Finish: *1500-grit Polished*

Flare Potential: *Medium - High*

Coverstock: *VTC-H19™ Hybrid Reactive*


Color: *Orange Pearl / Blue Solid*

Hardness: *73-75 on D-Scale*

CONDITION.

Bottom line the logic behind this ball was to produce a great performing ball in the HP2 line. Between the new core and the new cover, we are happy to announce we achieved what we set out to do. This ball will be ideal as a transition ball when the stronger balls become too early. And it will also excel on those higher friction lane surfaces and conditions as well.

Lane Condition - **Medium**

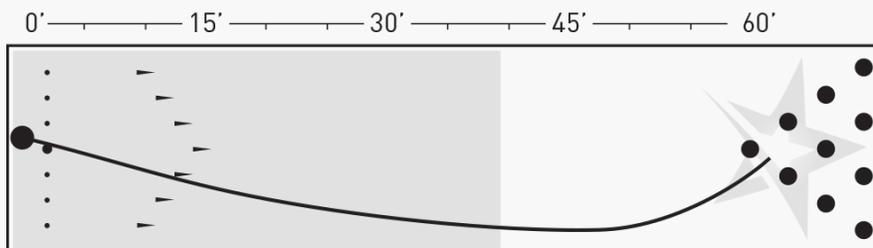

The ball path represents Roto Grip's bowling ball tester. Ask your pro shop professional how this ball will work for you.



HOW TO KEEP YOUR NEW BALL REACTING STRONG

We strongly believe that preventative maintenance is the key to a cover's longevity.

WHY? The ball's ability to absorb lane oil into the pores helps to keep a dry ball surface in contact with the lane for more friction, creating added hook. Over a period of time, the bowling ball's performance will slowly deteriorate due to oil absorption and dirt build up on the ball's surface.

In addition to using a clean and dry Roto Grip Shammy in competition, we highly recommend that a bowling ball cleaner be used immediately afterward to further clean the ball's cover. If a ball is used and then put away without cleaning, the oil and dirt will have a greater chance to be absorbed deeper into the cover.

We hear time and time again from people who have lost hook in their equipment and swear they clean it on a regular basis. Only when the question is asked about when they clean their equipment does the real problem come to light; cleaning a ball just before use removes only a very fine layer while the deeper trapped oil and dirt still remain from your last session. Below is our recommended procedure to maintain your ball's performance:

1. Use a clean, dry Roto Grip Shammy during competition
2. At the end of the session, use Storm Reacta Foam™ and spray liberally over the entire surface of the ball
3. Rub your hands over the surface of the ball in a scrubbing motion for 15-20 seconds
4. Towel off the ball until dry

This process will assist the degreasing agent in the cleaner to draw oil and dirt out of the pores; the hand-action helps break down the oil and dirt, making it easier to be removed with a towel.

Ball Maintenance Checklist

WHEN	POLISHED BALLS	DULL BALLS
<i>Between Shots</i>	<i>Wipe with Roto Grip Shammy</i>	<i>Wipe with Roto Grip Shammy</i>
<i>After Bowling</i>	<i>Clean with Storm Reacta Foam</i>	<i>Clean with Storm Reacta Foam</i>
<i>Every 10 Games</i>	<i>Re-polish surface with Storm Reacta Shine™</i>	<i>Scuff surface with Abralon® pad to maintain original reaction</i>
<i>Every 30 Games</i>	<i>Scuff surface with Abralon and re-polish with Storm Reacta Shine</i>	
<i>Every 60 Games</i>	<i>Ball is due for full resurface process</i>	

FOR MORE INFORMATION BE SURE TO CHECK OUT ROTOGRIP.COM

AND FOR MORE INFORMATION ABOUT OUR AWESOME APPAREL & ACCESSORIES
BE SURE TO CHECK OUT ROTOGEAR.COM