


Hy-Road™ Pearl

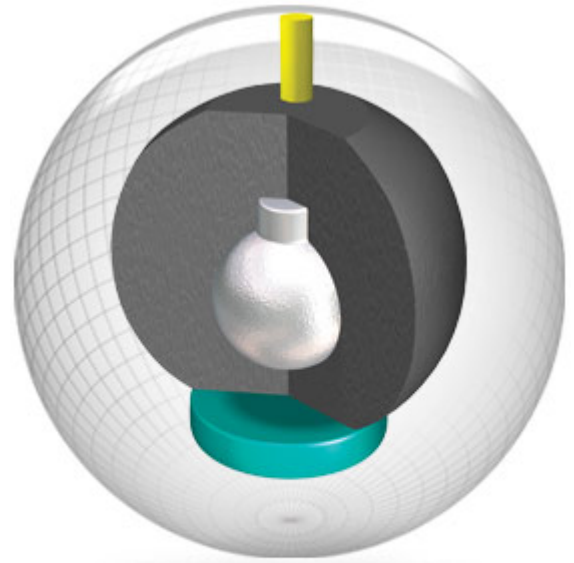

- COVERSTOCK:** R2S™ Pearl Reactive
- WEIGHT BLOCK:** Inverted Fe² Technology™
- LIGHT WEIGHT BLOCK:** Modified Centripetal™ Core
- FACTORY FINISH:** 1500-grit Polished
- BALL COLOR:** Blue/Purple
- DUROMETER:** 74-76 Rex D-scale
- FLARE POTENTIAL:** 5" - 6" (High)
- FRAGRANCE:** Grape Punch
- WEIGHTS:** 12-16 lbs.

Lbs.	RG	Diff.	Weight Block
16	2.52	0.058	
15	2.57	0.046	
14	2.58	0.037	
13	2.59	0.045	
12	2.65	0.035	

Resurfacing to a 1500-grit Polished Factory Finish

Resurface to the original factory finish using a ball spinner.

1. 500-grit Abralon® - Sand for 30 seconds on all four sides with firm pressure.
2. 1000-grit Abralon® - Sand for 20 seconds on all four sides with light pressure.
3. 2000-grit Abralon® - Sand for 20 seconds on all four sides with light pressure.
4. 4000-grit Abralon® - Sand for 20 seconds on all four sides with light pressure.
5. Storm Step Two™ - Polish lightly for 15 seconds each side.

Storm recommends using the suggested cleaner/polish daily. Storm also recommends touching up the surface with only the final step every 20 games and resurfacing completely every 30-50 games.



Use Reacta Shine™ Reactive Polish and Cleaner after every session.